

# TECHNICAL SPECIFICATION

## Nut Splitter


Stork's extensive range of subsea joint integrity and hydraulic tools offer quality products that deliver efficient and safe subsea operations.

The Nut Splitter provides a versatile, reliable and trouble free operation. The tool is available in a range of sizes from  $\frac{3}{4}$ " to  $3\frac{1}{2}$ " bolt diameters.

### Features:

- Triple edge disposable cutting blade
- Blade positioning scale to eliminate bolt damage
- Cutting depth adjusted by rotating the cylinder
- Designed to fit BS1560/ANSI B16.5 flanges
- Powered return subsea cylinders available



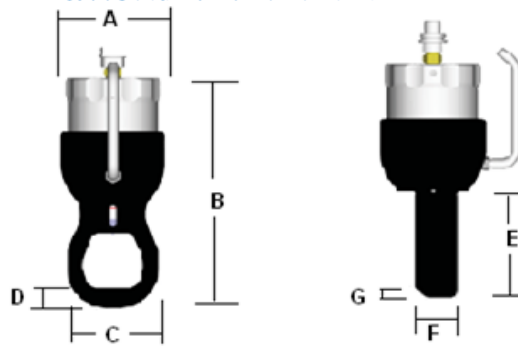

Tool Ref	Bolt Diameter		A	B	C	D	E	F	G	Approx Weight
	Imp	Metric	mm	mm	mm	mm	mm	mm	mm	Kg
ENS1-1	3/4" 7/8" 1"	M20 M22 M24 M27	104	228	76	18	104	40	9	6.7
ENS1-2	3/4" 7/8" 1" 1 1/8" 1 1/4"	M20 M22 M24 M27 M30 M33	104	239	90	21	110	40.5	10	6.9
ENS2-1	1 1/8" 1 1/4" 1 3/8" 1 1/2"	M30 M33 M36 M39	138	305	102	22	132	57.5	6	15.8
ENS2-2	1 1/8" 1 1/4" 1 3/8" 1 1/2" 1 5/8" 1 3/4"	M30 M33 M36 M39 M42 M45	136	314	114	23	141	57.5	6	16
ENS3-1	1 3/4" 1 7/8" 2"	M45 M48 M52	190	406	132	28	189	80.5	8	42
ENS3-2	1 3/4" 1 7/8" 2" 2 1/4"	M45 M48 M52 M56	190	416	145	30	199	80.5	8	42.5
ENS3-3	1 3/4" 1 7/8" 2" 2 1/4" 2 1/2"	M45 M48 M52 M56 M60 M64	190	426	160	31.5	200	80.5	8	43
ENS3-4	1 3/4" 1 7/8" 2" 2 1/4" 2 1/2" 2 3/4"	M45 M48 M52 M56 M60 M64 M68 M72	190	437	174	35	204	80.5	7	44
ENS4-1	2 3/4" 3"	M76 M80	235	474	189	36.5	235	110.5	4	73
ENS4-2	2 3/4" 3" 3 1/4" 3 1/2"	M76 M80 M85 M90	235	495	219	41	240	110.5	3	75